


AX-HS30W

AX-HS30W It is a horn speaker with the characteristics of solid durability, long service life, clear sound, and wide diffusion range, suitable for indoor and outdoor environments such as cars, stations, docks, and squares. Suitable for publicity and broadcasting in industries such as public security urban management, tourism, education, transportation, environmental sanitation, and business.


Three views

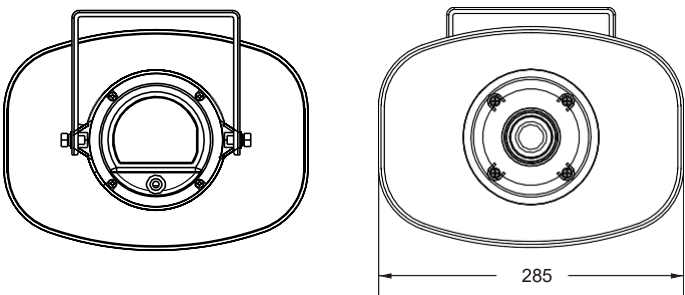


technical specifications

Electrical indicators	
Maximum power	45W
Rated power	30W
Audio mode	16 bit stereo CD sound quality
Sensitivity (1m/1W)	104dB
Maximum sound pressure level (1m/30W)	119dB
Frequency response range	250Hz ~ 7kHz
Open perspective (1kHz / -6dB)	140°
Adapter input power supply	DC12-24V
Volume	potentiometer adjustment
Connector	DC 2-core cable/audio input cable
Mechanical indicators	
Product size	285 x 205 x 285mm
Front shell	ABS
Rear shell	ABS
Product color	(RAL9016)
Product weight/inner box packing quantity	2.1kg/1PC
Inner box size (outer diameter)	31 x 25 x 31cm
Gross weight/packing quantity	11.5Kg/4PCS
Outer box size (outer diameter)	52.5 x 33 x 65.5cm
Environmental requirements	
Operating temperature	-25℃ to +55℃
Storage temperature	-40℃ to +70℃
Relative humidity	<95%
Protection	IP66


Dimensions (in millimeters)

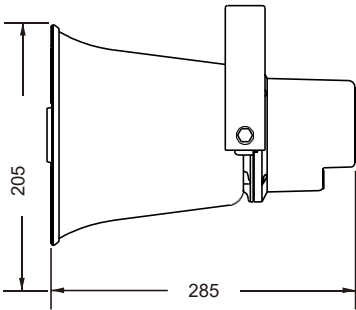

Frequency response diagram

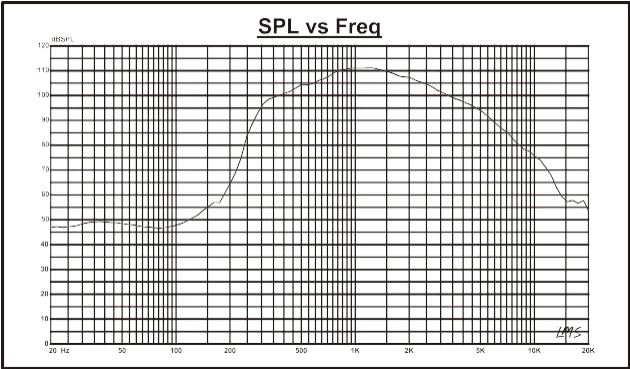

Impedance diagram

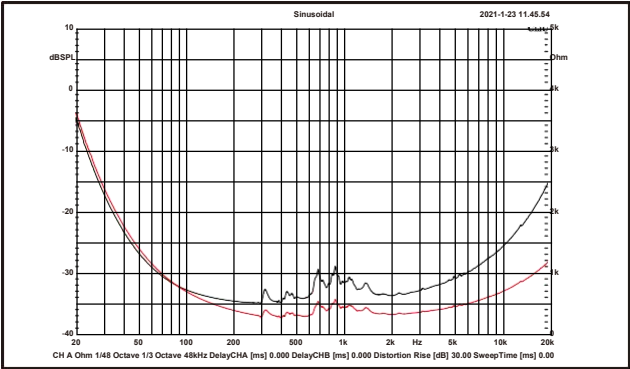

Directive pattern

