


OVERVIEW

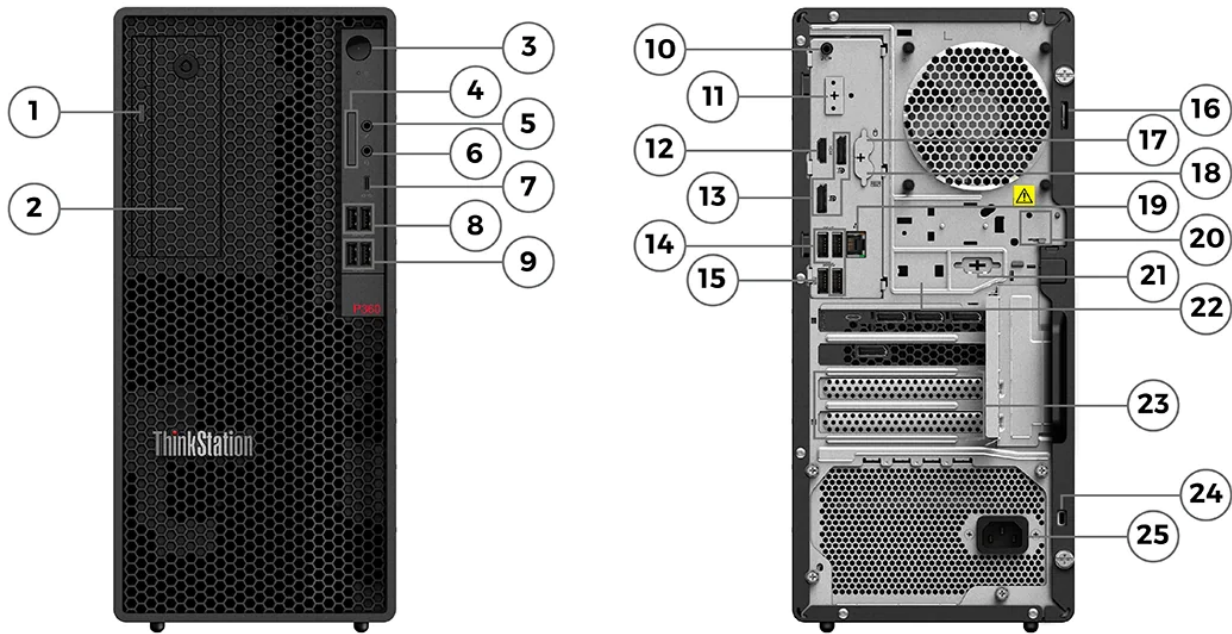

1. Optical drive *	14. 3x USB-A (USB 5Gbps)
2. Flex bay *	15. USB-A (USB 5Gbps), with Smart Power On
3. Power button	16. Padlock loop *
4. Card reader *	17. PS/2 port (mouse) *
5. Microphone (3.5mm)	18. PS/2 port (keyboard) *
6. Headphone / microphone combo jack (3.5mm)	19. Ethernet (RJ-45)
7. USB-C (USB 10Gbps), data transfer only	20. E-lock slot *
8. 2x USB-A (USB 5Gbps)	21. Serial (9-pin) *
9. 2x USB-A (USB 10Gbps)	22. Smart cable clip slots *
10. Line-out (3.5mm)	23. Optional ports on expansion cards *
11. Flex IO *	24. Kensington Security Slot
12. HDMI	25. Power connector
13. 2x DisplayPort	

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

12th Generation Intel® Core™ i3 / i5 / i7 / i9 Processor

Processor**^[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i3-12100	4 (4 P-core + 0 E-core)	8	P-core 3.3GHz	P-core 4.3GHz	12MB	DDR5-4800	Intel® UHD Graphics 730
Core i3-12300	4 (4 P-core + 0 E-core)	8	P-core 3.5GHz	P-core 4.4GHz	12MB	DDR5-4800	Intel® UHD Graphics 730
Core i5-12400	6 (6 P-core + 0 E-core)	12	P-core 2.5GHz	P-core 4.4GHz	18MB	DDR5-4800	Intel® UHD Graphics 730
Core i5-12500	6 (6 P-core + 0 E-core)	12	P-core 3.0GHz	P-core 4.6GHz	18MB	DDR5-4800	Intel® UHD Graphics 770
Core i5-12600	6 (6 P-core + 0 E-core)	12	P-core 3.3GHz	P-core 4.8GHz	18MB	DDR5-4800	Intel® UHD Graphics 770
Core i5-12600K	10 (6 P-core + 4 E-core)	16	P-core 3.7GHz / E-core 2.8GHz	P-core 4.9GHz / E-core 3.6GHz	20MB	DDR5-4800	Intel® UHD Graphics 770
Core i7-12700	12 (8 P-core + 4 E-core)	20	P-core 2.1GHz / E-core 1.6GHz	Max Turbo up to 4.9GHz / P-core 4.8GHz / E-core 3.6GHz	25MB	DDR5-4800	Intel® UHD Graphics 770
Core i7-12700K	12 (8 P-core + 4 E-core)	20	P-core 3.6GHz / E-core 2.7GHz	Max Turbo up to 5.0GHz / P-core 4.9GHz / E-core 3.8GHz	25MB	DDR5-4800	Intel® UHD Graphics 770
Core i9-12900	16 (8 P-core + 8 E-core)	24	P-core 2.4GHz / E-core 1.8GHz	Max Turbo up to 5.1GHz / P-core 5.0GHz / E-core 3.8GHz	30MB	DDR5-4800	Intel® UHD Graphics 770
Core i9-12900K	16 (8 P-core + 8 E-core)	24	P-core 3.2GHz / E-core 2.4GHz	Max Turbo up to 5.2GHz / P-core 5.1GHz / E-core 3.9GHz	30MB	DDR5-4800	Intel® UHD Graphics 770

Processor Sockets

1x FCLGA1700

Notes:

[1] Intel® Max Turbo frequency will vary depending on application workload and the hardware and software configurations, see

<http://www.intel.com/technology/turboboost/> for more information.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 8.7 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No preload operating system

Graphics

Integrated Graphics**

- Intel® UHD Graphics 730
- Intel® UHD Graphics 770

Discrete Graphics Support^[1]

Supports up to one NVIDIA® RTX A5000 or NVIDIA® GeForce RTX™ 3080

Discrete Graphics Offering***

Graphics	Memory	Power	Connector	Form Factor	SLI / NVLink
NVIDIA® T400	2GB GDDR6	40W	3x miniDP 1.4	Single slot	None
NVIDIA® T400 4GB	4GB GDDR6	40W	3x miniDP 1.4	Single slot	None
NVIDIA® T600	4GB GDDR6	40W	4x miniDP 1.4	Single slot	None
NVIDIA® T1000	4GB GDDR6	50W	4x miniDP 1.4	Single slot	None
NVIDIA® T1000 8GB	8GB GDDR6	50W	4x miniDP 1.4	Single slot	None
NVIDIA® RTX A2000	6GB GDDR6	70W	4x miniDP 1.4a	Dual slot	None
NVIDIA® RTX A2000 12GB	12GB GDDR6	70W	4x miniDP 1.4a	Dual slot	None
NVIDIA® RTX A4000	16GB GDDR6 with ECC	140W	4x DP 1.4a	Single slot	None
NVIDIA® RTX A4500	20GB GDDR6 with ECC	200W	4x DP 1.4	Dual slot	None
NVIDIA® RTX A5000	24GB GDDR6 with ECC	230W	4x DP 1.4a	Dual slot	None
NVIDIA® GeForce RTX™ 3060	12GB GDDR6	170W	3x DP 1.4a, 1x HDMI® 2.1 FRL	Dual slot	None
NVIDIA® GeForce RTX™ 3070 Ti	8GB GDDR6	290W	3x DP 1.4a, 1x HDMI® 2.1 FRL	Triple slot	None
NVIDIA® GeForce RTX™ 3080	10GB GDDR6	320W	3x DP 1.4a, 1x HDMI® 2.1 FRL	Triple slot	None

Notes:

[1] Discrete graphics support may vary by configurations such as processor selection or power supply wattage.

Monitor Support

Monitor Support

Onboard graphics supports up to 4 independent displays via onboard two DP, one HDMI® and one optional USB-C®; the number of maximum monitors also depends on the discrete graphic card in use

Chipset

Chipset

Intel® W680 chipset

Memory

Max Memory^[1]

Up to 128GB (4x 32GB DDR5 UDIMM)

Memory Type**^[2]

- DDR5-4400 UDIMM ECC, maximum transfer speeds of up to 4400 MT/s
- DDR5-4400 UDIMM non-ECC, maximum transfer speeds of up to 4400 MT/s

Memory Slots

Four DDR5 UDIMM slots, dual-channel capable

Memory Protection

ECC on models with ECC DIMMs and ECC capable processor

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

[2] 4400 MT/s is maximum operating speed, memory operating speed varies depending on memory configuration:

1x 8GB / 2x 8GB / 1x 16GB / 2x 16GB / 2x 32GB configurations run at 4400 MT/s;

4x 8GB / 4x 16GB configurations run at 4000 MT/s;

4x 32GB configuration runs at 3600 MT/s.

Storage

Storage Support^[1]

Up to 2x 3.5" SATA HDD or 4x 2.5" SATA HDD; also supports up to 3x M.2 SSD (2 by onboard, 1 by M.2 to PCIe® adapter)

- 3.5" HDD up to 4TB each
- 2.5" HDD up to 1TB each

- Onboard M.2 SSD up to 4TB each
- M.2 SSD by M.2 to PCIe[®] adapter up to 2TB

Storage Type^{***[2]}

Disk Type	Interface	RPM	Offering	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 1TB FIPS	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 2TB / 4TB	-
M.2 2280 SSD for Onboard M.2 slots	PCIe [®] NVMe [®] , PCIe [®] 4.0 x4 Performance	-	512GB / 1TB / 2TB / 4TB	Opal 2.0
M.2 2280 SSD	PCIe [®] NVMe [®] , PCIe [®] 4.0 x4	-	256GB	Opal 2.0

Storage Controllers^[3]

Storage Controller	Type	Interface	RAID	Cache
Integrated NVMe [®] controller	Standard	PCIe [®] NVMe [®]	0/1	None
Integrated SATA controller	Standard	SATA 6.0Gb/s	0/1/10/5	None

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo[®] storage offerings.

[2] When using M.2 to PCIe[®] adapter, M.2 SSD works at PCIe[®] Gen 3. 4TB M.2 SSD is pending availability.

[3] NVMe[®] RAID is supported on onboard M.2 slots. SATA RAID 5 and 10 are supported on 2.5" HDD.

Removable Storage

Optical Support

Optional one 9.0mm optical drive, DVD-ROM, DVD±RW, and Blu-ray

Card Reader

- SD card reader
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek[®] ALC897Q-CG codec

Speakers

Single speaker, 2W x1

Power Supply

Power Supply^{**}

Power	Type	Efficiency	Key Features
500W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified
750W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified

DESIGN

Mechanical

Form Factor

Tower (17L)

Dimensions (WxDxH)^[1]

170 x 315.4 x 376 mm (6.7 x 12.4 x 14.8 inches)

Weight^[2]

9.67 kg (21.32 lbs, maximum configuration)

Bays

- 1x 3.5" disk bay (standard)
- 1x 3.5" disk bay (optional)

- 2x 2.5" disk bay (optional)

Expansion Slots

Supports four PCIe® slots with two PCIe® 4.0 x16 and two PCIe® 3.0 x1.

- Slot 1: PCIe® 4.0 x16, full height, full length, 75W, double-width
- Slot 2: PCIe® 3.0 x1, full height, half length, 25W
- Slot 3: PCIe® 4.0 x16 (x4 lanes), full height, half length, 25W
- Slot 4: PCIe® 3.0 x1, full height, half length, 25W

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel® Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

Up to two additional PCIe® x1 Ethernet adapters or one PCIe® x4 Ethernet adapter support, up to one additional 10 GbE ports

- Gigabit Ethernet, Intel® I210-T1, 1x RJ-45, PCIe® x1
- Gigabit Ethernet, Intel® I350-T2, 2x RJ-45, PCIe® x4
- Gigabit Ethernet, Broadcom BCM5719, 4x RJ-45, PCIe® x4
- Gigabit Ethernet, Broadcom BCM5720, 2x RJ-45, PCIe® x1
- Gigabit Ethernet, Realtek® RTL8168H, 1x RJ-45, PCIe® x1
- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45, PCIe® x1
- 10 Gigabit Ethernet, Marvell AQtion AQN-107, 1x RJ-45, PCIe® x4

WLAN + Bluetooth®**

- Intel® Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1 (Bluetooth® 5.2 hardware ready), Intel® vPro® technology support
- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1 (Bluetooth® 5.3 hardware ready), Intel® vPro® technology support^[1]
- No WLAN and Bluetooth®

Notes:

[1] Bluetooth® 5.3 is hardware ready but may run at a lower version due to OS limitations. Wi-Fi® 6E is only enabled on Windows® 11 and operates as Wi-Fi® 6 with Windows® 10.

Ports^[1]

Front Ports

- 1x USB-C® (USB 10Gbps / USB 3.2 Gen 2), data transfer only
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 2x USB-A (USB 10Gbps / USB 3.2 Gen 2)
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Rear Ports^[2]

- 4x USB-A (USB 5Gbps / USB 3.2 Gen 1), one supports Smart Power On
- 1x HDMI® 2.1 TMDS
- 2x DisplayPort™ 1.4
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

Optional Rear Ports^[3]

- 1x USB-C® (USB 5Gbps / USB 3.2 Gen 1), with DisplayPort™ function (Flex IO)
- 1x HDMI® 2.1 TMDS (Flex IO)
- 1x DP 1.2 (Flex IO)
- 1x VGA (Flex IO)
- 1x parallel (via cable and PCIe® bracket)

- 1x Thunderbolt™ 4 (via additional PCIe® adapter)
- 1x USB-C® (USB 20Gbps / USB 3.2 Gen 2x2), support data transfer, via USB-C® PCIe® x4 card
- 2x USB-A (Hi-Speed USB / USB 2.0), via cable and PCIe® bracket
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1), via additional PCIe® adapter
- 1x serial (via cable)
- 4x serial (via 4-port serial expansion card, PCIe® x1)
- 2x PS/2 (via cable)

Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes, and other factors related to system configuration and your operating environment, will be slower than the theoretical speed.

[2] For video ports on discrete graphics, please see graphics section.

[3] 2x USB 2.0 and 1x parallel can not be chosen simultaneously. USB 2.0 and parallel occupy a PCIe® slot.

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

- (Optional) Cable lock
- (Optional) E-lock
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

BIOS Security

- Administrator password
- Power-on password

MANAGEABILITY

System Management

System Management^[1]

- Intel® vPro® Enterprise with Intel® AMT 16
- Non-vPro®

Notes:

[1] Intel® vPro® offers a superset of DASH's defined capabilities.

SERVICE

Warranty^[1]

Base Warranty**

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

OPERATING REQUIREMENTS

Operating Environment

Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

CERTIFICATIONS

Green Certifications^[1]

Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Gold Registered^[2]
- ErP Lot 3
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

ISV Certifications

ISV Certifications

Please visit [ISV certifications for Lenovo® Workstations](#)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

