


CAT 5e UTP SOLID SPECIFICATION

BDN-5E100C


MODEL	BDN-5E100C	
PRODUCT & SPEC.	CAT 5e	
INDESIDE	4 Pair	
CONDUCTOR	Grade	24AWG
	Diameter	0,40mm±0,01mm
	Material	PURE COPPER
	Work datapass	150M-180M
INSULATION	Material	HDPE (High-density Polyethylene)
	HDPE OD	0,95mm±0,02mm
	HDPE Thickness	0,2mm
PAIRED PITCH	blue/blue&white	12mm
	Orange /Orange &white	16mm
	green/green&white	14mm
	Brown/Brown&white	18mm
FILLING	Ricord	300D Stranded Ricord
	Corss Diameter	4,8mm
OUTER JACKET	Material	NEW PVC
	Color	WHITE
	PVC OD	5,8mm±0,02mm
	PVC Thickness	0,6mm
	SURFACE	Smooth
	Conductor ResistanceΩ/1000FT	≤60Ω
PERFORMANCE	Conductor allow load current(A)	0,5A
	Voltage Rating(V)	≤30V
	Operating Temperature(°C)	-60°C — +75°C
PACKING	LENGTH	1000FT
	BOX SIZE	37*37,5*20CM
APPLICATION	100Base-TX 100Base-T4 100VG-AnyLAN 1000Base-T(Gigabit Ethernet)	
STANDARD	1. ISO/EIA 11801 2. TIA/EIA 568 -B 3. IEC 6156-5	
CERTIFICATION	CE,ROHS,ISO	
	BDN UTP CAT 5e 100%Cu 24AWG 4P TIA/EIA VERIFIED CMR 001-305M	

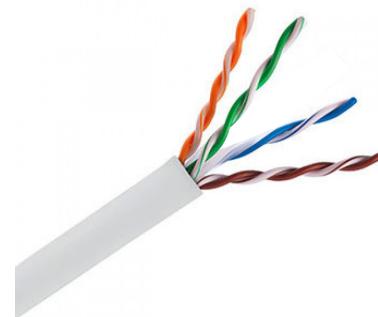


- S means standard model; H means long time model.
- All specifications are subject to change without notice.

CAT 5e UTP SOLID SPECIFICATION

BDN-5E100C

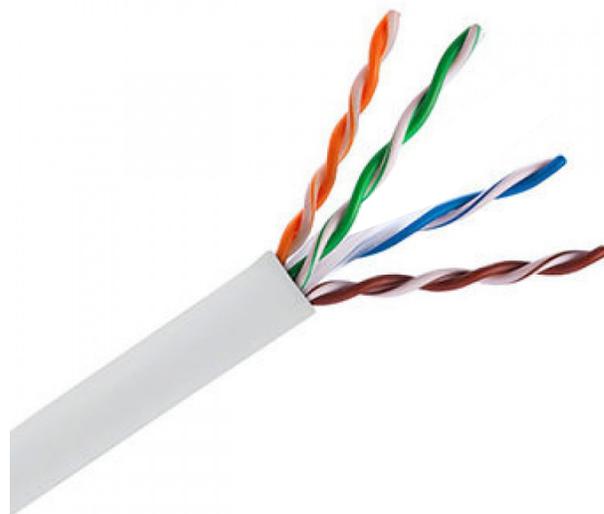

BDN CABLE DIAGRAM

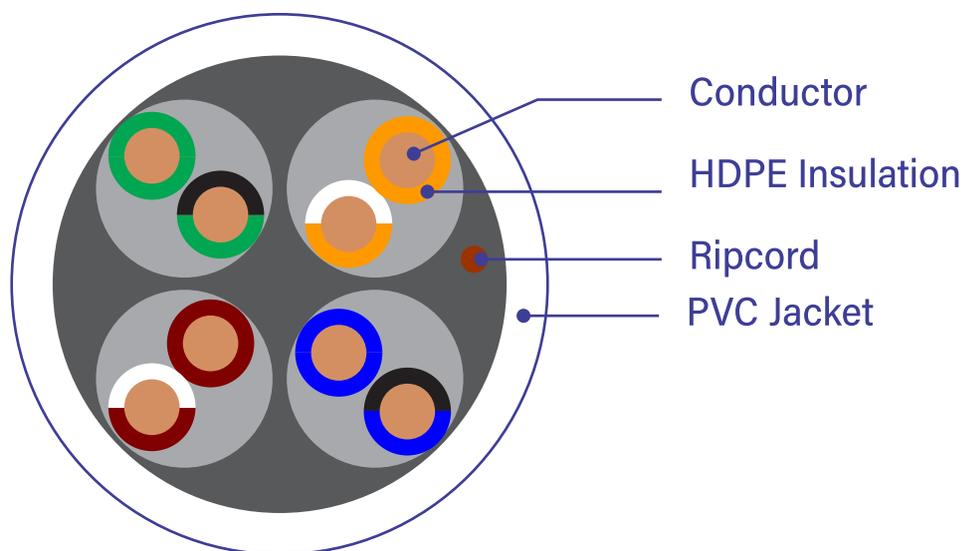

● S means standard model; H means long time model.
● All specifications are subject to change without notice.