



# **GT Series**


Colour Video Four Wire Digital Apartment Intercom 16 entries and 500 apartments



**Video Apartment Security Intercom** 

## Colour Four Wire Digital Video Apartment Intercom

## **System Configuration**

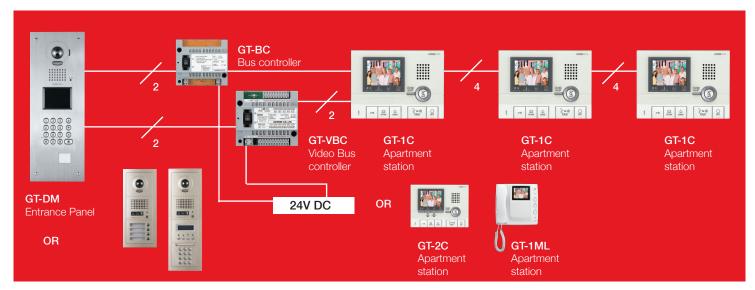

#### **Features**

- Hands free or handset apartment stations
- Digital Pan/Tilt and Zoom (GT-1C/GT-2C)
- Modular or all-in-one entrance station
- Up to 500 residences
- Up to 16 common entrance points
- Individual colour video door station per residence (requires GT-2C)
- Up to 3 colour video sub stations per residence with internal communication (requires GT-2C)
- Up to 500 access codes for residents
- Concierge or guard station call feature (requires GT-MK)
- Picture memory internal station (requires GT-2C)

### Specifications

Power	source	24V DC 2	2Amps		
Call-in		Electronic	Electronic tone with adjustable volume		
Door release		N/O or N 4 Amp 24	N/O or N/C dry contact. Contact rating 4 Amp 24V AC or DC		
Wiring	2x2 parallel wires, non-polarised for video and audio communication busses. A bus can support up to 25 GT video stations				
Distance					
	Diameter	0.65mm	0.8mm	1.0mm	
	GT-VBC to furthest internal station				
		100m	150m	150m	
	GT-VBC to entrance station				

100m

### Additional Options

GT-2C

Hands free colour video apartment station with picture memory

GT-2CL

Hands free colour video apartment station with hearing loop and picture memory

GT-2H

Hands free colour video sub station GT-2HL

Hands free colour video substation with hearing loop

GT-1C

Hands free colour video apartment station

GT-1CL

Hands free colour video apartment station with hearing loop

GT-1ML

Handset colour video apartment station with hearing loop in handset

GT-HS

Optional handset for GT-1C/L, GT-2C/L,

GT-1A

Hands free audio apartment station GT-1D

Handset audio apartment station with hearing loop in

handset GT-DM

All-in-one stainless steel colour video door station

GT-VA

Colour camera module GT-VP

Panel GT-DAL Audio module GT-DPL Panel

GT-NS Name scroll module

GT-NSP Panel GT-10K Keypad panel GF-1P

1 call plate GF-2P 2 call plate GF-3P

3 call plate GF-4P 4 call plate

GT-SW Call switch module GT-BC

Audio bus control GT-BCX Audio bus expander

GT-VBC

Video bus control GT-VBX

Video bus expander GT-4Z

4 way video splitter

GF-2F

2 Module frame GF-3F

3 module frame GT-4F

4 module frame

GF-2B

Back box

GF-3B Back box GT-4B

Back box GF-BP

Blank panel GT-AC

Access control keypad **EL-12S** 

Door release GT-RY

Light control relay TPS252DC Power supply

## Cables

- 0.5mm ~ 1.2mm (0.9mm recommended)
- PE (polyethylene) insulated cable (KB Wire)
- Solid copper conductor



50m



300m

